


## AI - REDUCIR SPOJNA ČAURA , 10-35kV

### BEZ PREGRADE

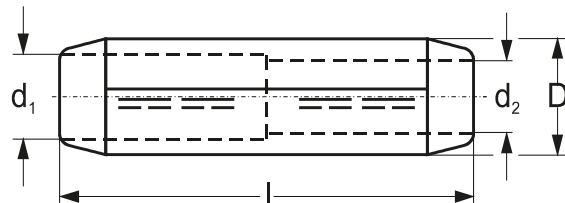

- Materijal: Aluminijum 99,5%
- Površina: Hemijski pasivizirana
- Namena: Koristi se za srednji napon 10-35kV
- Presovanje: Šestougaono

Šifra proizvoda	Presek provodnika /mm <sup>2</sup>	Dimenzije (mm)				Broj presovanja šestougaono		Težina kg za 100
		D	d1	d2	L	mehaničko	hidraulično	
0701333	35/25	14	8.3	7.0	90	4-4	2-2	5.5
0701335	50/25	16	10.0	7.0	90	4-4	2-2	5.5
0701336	50/35	16	10.0	8.3	90	4-4	2-2	5.5
0701337	70/35	18	11.5	8.3	95	4-4	2-2	6.5
0701338	70/50	18	11.5	10.0	95	4-4	2-2	7.0
0701340	95/50	22	13.5	10.0	100	4-4	2-2	11.5
0701341	95/70	22	13.5	11.3	100	4-4	2-2	11.0
0701344	120/70	22	14.8	11.3	105	4-4	2-2	13.0
0701345	120/95	22	14.8	13.5	105	4-4	2-2	12.5
0701348	150/95	25	16.5	13.5	105	4-4	2-2	14.5
0701349	150/120	25	16.5	14.8	105	4-4	2-2	14.0
0701352	185/120	28	18.3	14.8	125	5-5	2-2	17.5
0701353	185/150	28	18.3	16.5	125	5-5	2-2	17.0
0701355	240/150	32	21.0	16.5	125	5-5	2-2	22.5
0701356	240/185	32	21.0	18.3	125	5-5	2-2	22.0
0701357	300/185	34	23.4	18.3	125	5-5	2-2	36.0
0701358	300/240	34	23.4	21.0	125	5-5	2-2	35.0
0701359	400/240	38	26.0	21.0	150	-	3-3	36.0
0701360	400/300	38	26.0	23.6	150	-	3-3	36.5
0701361	500/240	44	29.0	21.0	195	-	3-3	-