


AI - REDUCIR SPOJNA ČAURA , 10-35kV SA PREGRADOM – PO SIMELU

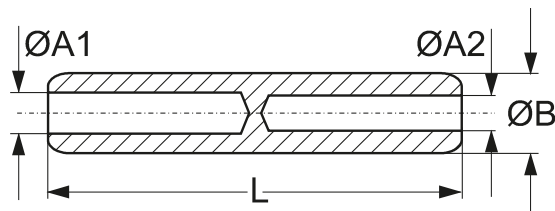

- Materijal: Aluminijum 99,5%
- Površina: Hemijski pasivizirana
- Namena: Koristi se za nenapregnute veze niskog i srednjeg napona
- Presovanje: Dubokim utiskivanjem u zatvorenoj matrici

Šifra proizvoda	Poprečni presek (mm ²)	Dimenzije (mm)				Težina (g)	Standardno pakovanje
		ØB	ØA ₁	ØA ₂	L		
0701100	50-25	20	9,0	6,5	106,5	100	3
0700101	50-35	20	9,0	8,0	106,5	95	3
0700104	70-35	20	11,0	8,0	106,5	95	3
0700105	70-50	20	11,0	9,0	106,5	90	3
0701106	95-25	20	12,5	6,5	106,5	90	3
0700106	95-35	20	12,5	8,0	106,5	85	3
0700107	95-50	20	12,5	9,0	106,5	80	3
0700108	95-70	20	12,5	11,0	106,5	85	3
0700110	120-50	25	13,5	9,0	133,0	85	3
0700112	120-95	25	13,5	12,5	133,0	85	3
0700113	150-35	25	15,5	8,0	133,0	155	3
0700114	150-50	25	15,5	9,0	133,0	150	3
0700115	150-70	25	15,5	11,0	133,0	150	3
0700116	150-95	25	15,5	12,5	133,0	140	3
0700117	150-120	25	15,5	13,7	133,0	140	3
0700119	185-150	32	17,0	15,5	143,5	140	3
0701120	240-70	32	19,5	11,0	143,5	290	3
0701121	240-95	32	19,5	12,5	143,5	250	3
0701122	240-120	32	19,5	13,7	143,5	250	3
0700123	240-150	32	19,5	15,5	143,5	240	3
0700124	240-185	32	19,5	17,0	143,5	240	3