


AI – REDUCIR SPOJNA ČAURA, 10-35kV

SA PREGRADOM

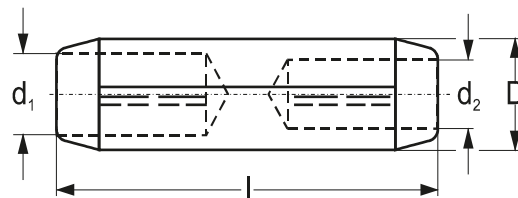

- Materijal: Aluminijum 99,5%
- Površina: Hemijski pasivizirana
- Namena: Koristi se za srednji napon 10-35kV
- Presovanje: Šestougaono

Šifra proizvoda	Presek provodnika RM/SM/mm ² /	Dimenzije (mm)				Broj presovanja šestougaono		Težina kg za 100
		D	d1	d2	L	mehaničko	hidraulično	
0700133	35/25	14	8.3	7.0	95	4 - 4	2 - 2	5.5
0700135	50/25	16	10.0	7.0	95	4 - 4	2 - 2	5.5
0700136	50/35	16	10.0	8.3	95	4 - 4	2 - 2	3.6
0700137	70/35	18	11.3	8.3	100	4 - 4	2 - 2	9.6
0700138	70/50	18	11.3	10.0	100	4 - 4	2 - 2	9.4
0700139	95/35	22	13.6	10.0	105	4 - 4	2 - 2	9.2
0700140	95/70	22	13.6	11.3	105	4 - 4	2 - 2	9.1
0700144	120/70	22	14.8	11.3	110	4 - 4	2 - 2	9.3
0700145	120/95	22	14.8	13.5	110	4 - 4	2 - 2	8.6
0700148	150/95	25	16.5	13.5	110	4 - 4	2 - 2	10.9
0700149	150/120	25	16.5	14.8	110	4 - 4	2 - 2	10.4
0700152	185/120	28	18.3	14.8	130	5 - 5	2 - 2	16.3
0700153	185/150	28	18.3	16.5	130	5 - 5	2 - 2	15.7
0700154	240/95	32	21.0	13.5	130	5 - 5	2 - 2	19.5
0700155	240/150	32	21.0	16.5	130	5 - 5	2 - 2	20.2
0700156	240/185	32	21.0	18.3	130	5 - 5	2 - 2	19.2
0700157	300/185	34	23.4	18.3	135	5 - 5	2 - 2	22.6
0700158	300/240	34	23.4	21.0	135	5 - 5	2 - 2	21.2
0700159	400/240	38	26.0	21.0	165		3 - 3	61.0
0700130	400-300	38	26.0	21.0	165		3 - 3	61.0

Za dve ili više promena poprečnog preseka spoljašnji prečnik manjeg preseka je stepenovan.

RM – žičani okrugli,

SM – žičani sektorski