


## Cu – REDUCIR SPOJNA ČAURA, 10-35kV

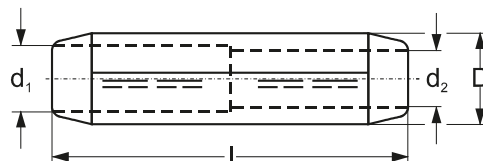

- Materijal: Elektrolitički bakar
- Površina: Hemijski pasivizirana/ na poseban zahtev elektro kalaisana
- Namena: Koristi se za nenapregnute veze napona 10-35kV
- Presovanje: Šestougaono

Šifra proizvoda	Presek provodnika /mm <sup>2</sup> /	Dimenzije (mm)				Broj presovanja		Težina kg za 100
		D	d <sub>1</sub>	d <sub>2</sub>	L	mehaničko	hidraulično	
0700720	35/25	12	8.2	7.0	50	2 – 2	1 – 1	
0700721	50/25	14	10.0	7.0	65	3 – 3	1 – 1	
0700722	50/35	14	10.0	8.2	65	3 – 3	1 – 1	
0700723	70/35	16	11.5	8.2	65	3 – 3	1 – 1	
0700724	70/50	16	11.5	10.0	65	3 – 3	1 – 1	
0700725	95/50	18	13.5	10.0	90	4 – 2	2 – 2	
0700726	95/70	18	13.5	11.5	90	4 – 2	2 – 2	
0700727	120/50	20	15.5	10.0	90	4 – 4	2 – 2	
0700728	120/70	20	15.5	11.5	90	4 – 4	2 – 2	
0700750	120/95	20	15.5	13.5	90	4 – 4	2 – 2	
0700729	150/70	22	17.0	11.5	106	4 – 4	2 – 2	
0700730	150/95	22	17.0	13.5	106	4 – 4	2 – 2	
0700731	150/120	22	17.0	15.5	106	4 – 4	2 – 2	
0700732	185/95	25	19.0	13.5	106	4 – 4	2 – 2	
0700733	185/120	25	19.0	15.5	106	4 – 4	2 – 2	
0700734	185/150	25	19.0	17.0	106	4 – 4	2 – 2	
0700736	240/120	28	21.5	15.5	110		2 – 2	
0700737	240/150	28	21.5	17.0	110		2 – 2	
0700738	240/185	28	21.5	19.0	110		2 – 2	
0700739	300/150	32	24.0	17.0	116		2 – 2	
0700740	300/185	32	24.0	19.0	116		2 – 2	
0700741	300/240	32	24.0	21.5	116		2 – 2	
0700742	400/185	38	26.0	19.0	160		3 – 3	
0700743	400/240	38	26.0	21.5	160		3 – 3	
0700744	400/300	38	26.0	54.5	160		3 – 3	